

➤ **Features:**

- Band Pass Filter
- Fc 960 MHz
- Passband 710 – 1210 MHz
- 1.0 dB Max. Insertion Loss



➤ **Specifications:**

S/N				
Center Frequency 960 MHz Nominal				
3 dB Bandwidth 500 MHz Min. 710 max. 1210 min. MHz				
INSERTION LOSS 1.0dB Max. At FC				
VSWR (-12.0 dB) 730 max. 1190 min. MHz				
LOWER STOP-BAND ATTENUATION 45 dB Min. 70 to 570 MHz				
LOWER STOP-BAND ATTENUATION 25 dB Min. 640 MHz				
UPPER STOP-BAND ATTENUATION 25dB Min. 1280 MHz				
UPPER STOP-BAND ATTENUATION 45dB Min. 1350 to 4000 MHz				




**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
 PHONE: 410-742-8858  
 FAX: 410-548-7860  
[www.microwave2000.com](http://www.microwave2000.com)

106-990-0333

➤ Outline Drawing:

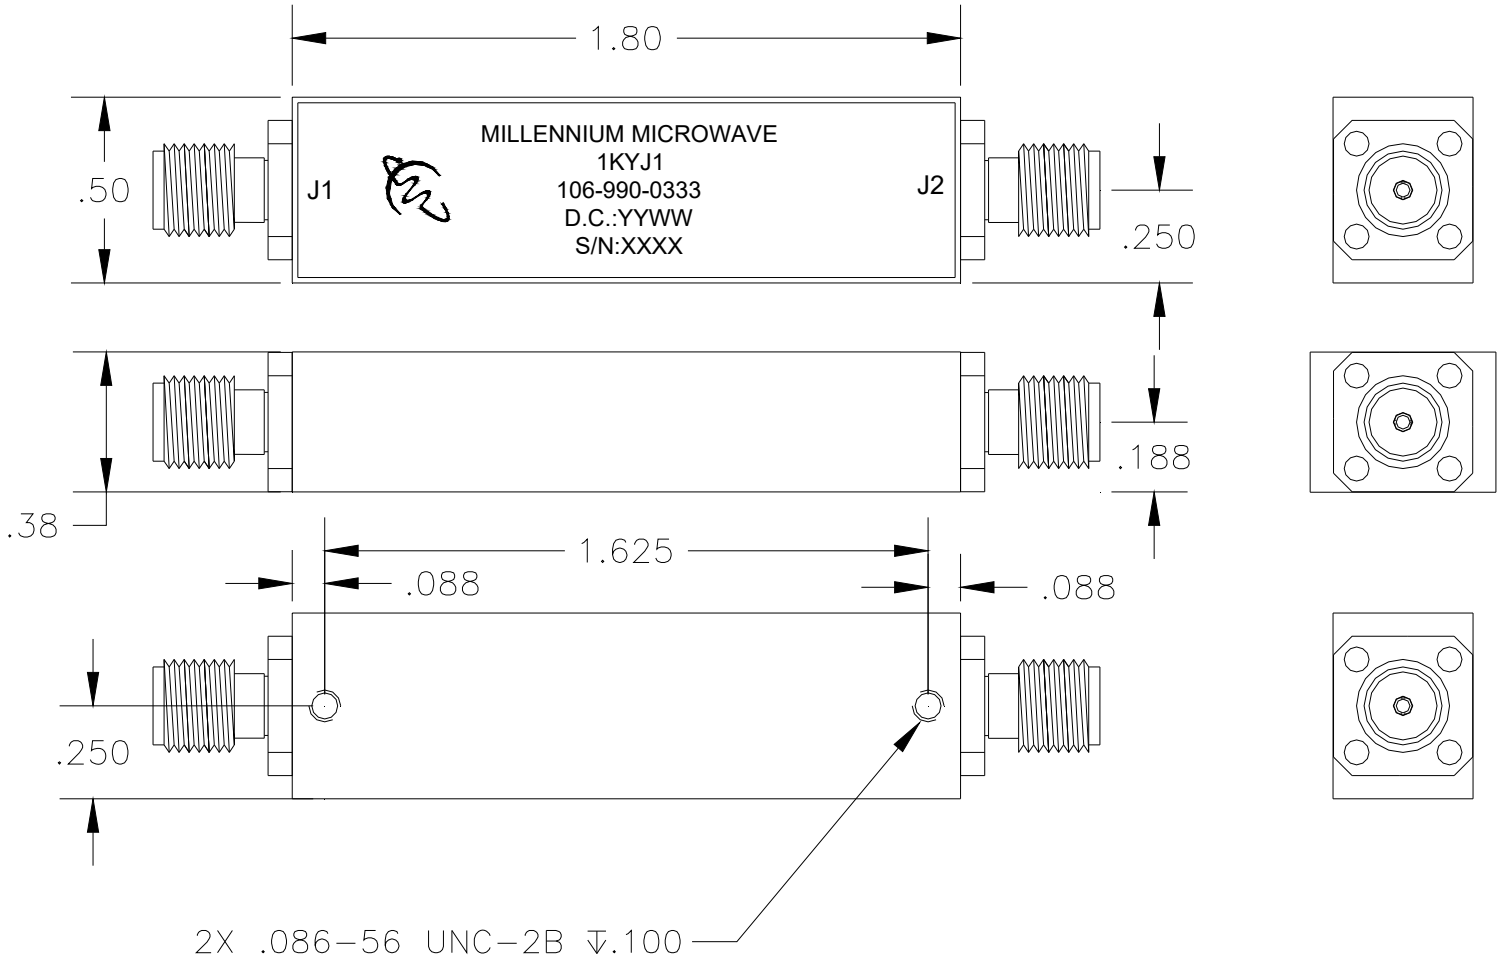

MILLENNIUM  
MICROWAVE  
CORPORATION

MILLENNIUM MICROWAVE CORPORATION  
30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
PHONE: 410-742-8858  
FAX: 410-548-7860  
www.microwave2000.com