


# SP2T-2001NR-A

## Features:

- Single Pole 2 Throw
- Non-Reflective
- 0.5 – 2 GHz
- 70 dB Isolation

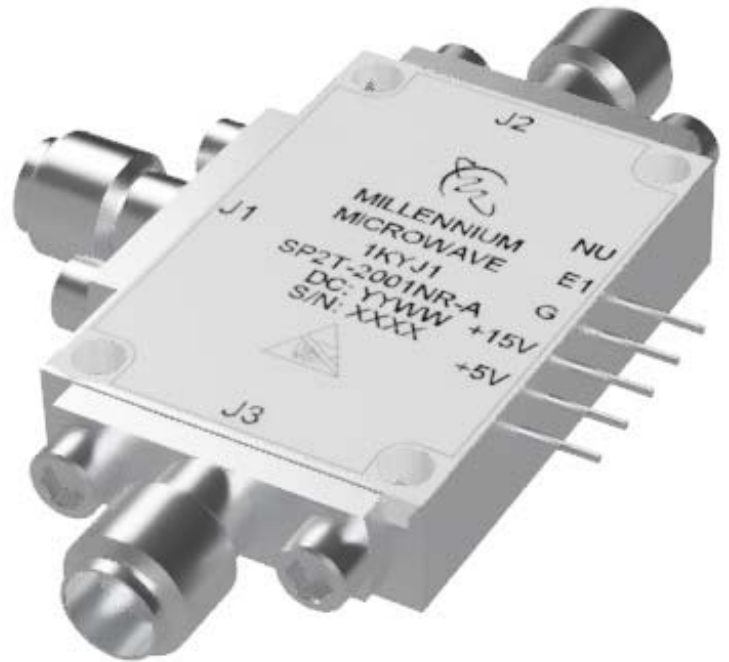

## Specifications:

SERIAL NUMBER	SELECTED PATH	FREQUENCY	INSERTION LOSS	VSWR INPUT	VSWR OUTPUT	VSWR OUTPUT (OFF)	ISOLATION	SWITCHING SPEED	VERIFY LOGIC
	J1-J2	0.5 -2.0 GHz	2.0 dB Max	10.16 dBr Min	10.16 dBr Min	10.16 dBr Min	70dB Min	300 nS Max	
	J1-J3								
	J1-J2								
	J1-J3								
	J1-J2								
	J1-J3								

Control Logic (TTL)	0	1
	J1-J2 ON	J1-J3 ON
DC Power MAX	+5V 50 mA	<50 mA
	+15V 50 mA	<50 mA




**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
 PHONE: 410-742-8858  
 FAX: 410-548-7860  
[www.microwave2000.com](http://www.microwave2000.com)

# SP2T-2001NR-A

## ➤ Outline Drawing:

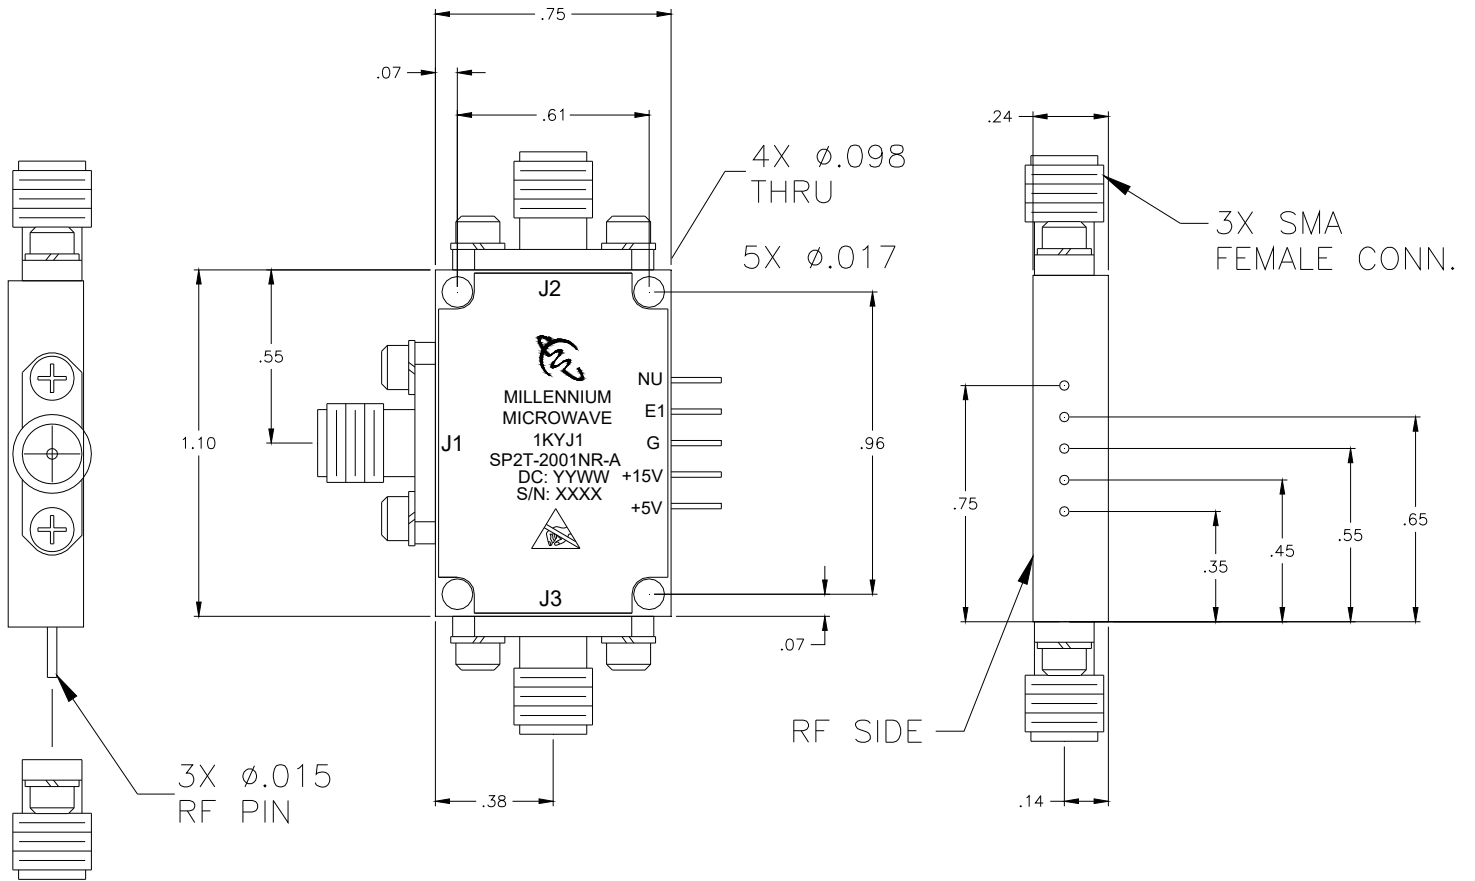

**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
PHONE: 410-742-8858  
FAX: 410-548-7860  
[www.microwave2000.com](http://www.microwave2000.com)