


SP2T-2013R-A

➤ Features:

- Single Pole 2 Throw
- Reflective
- 60 dB Isolation
- 0.5 – 18 GHz

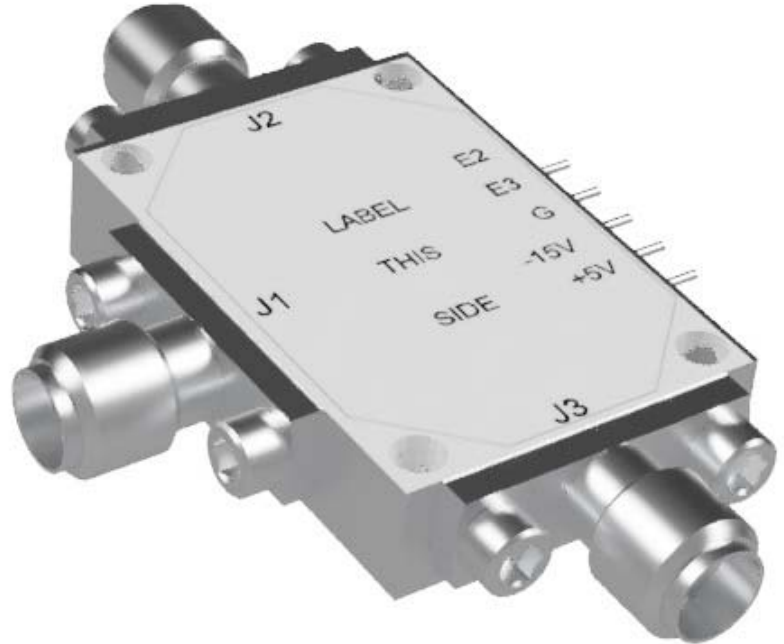

➤ Specifications:

SERIAL NUMBER	SELECTED PATH	FREQUENCY	INSERTION LOSS	VSWR INPUT	VSWR OUTPUT	ISOLATION	SWITCHING SPEED	VERIFY LOGIC	
	J1-J2	0.5 - 18 GHz	2.5 dB Max	9.5 dBr Min	9.5 dBr Min	60 dB Min	250 nS Max		
	J1-J3								
	J1-J2								
	J1-J3								
	J1-J2								
	J1-J3								
	J1-J2								
	J1-J3								

SELECT	E2	E3
J1-J3	0	1
J1-J2	1	0

DC POWER	
+5V @ 50 mA	
-15V @ 40 mA	




**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853
 PHONE: 410-742-8858
 FAX: 410-548-7860
www.microwave2000.com

SP2T-2013R-A

➤ Outline Drawing:

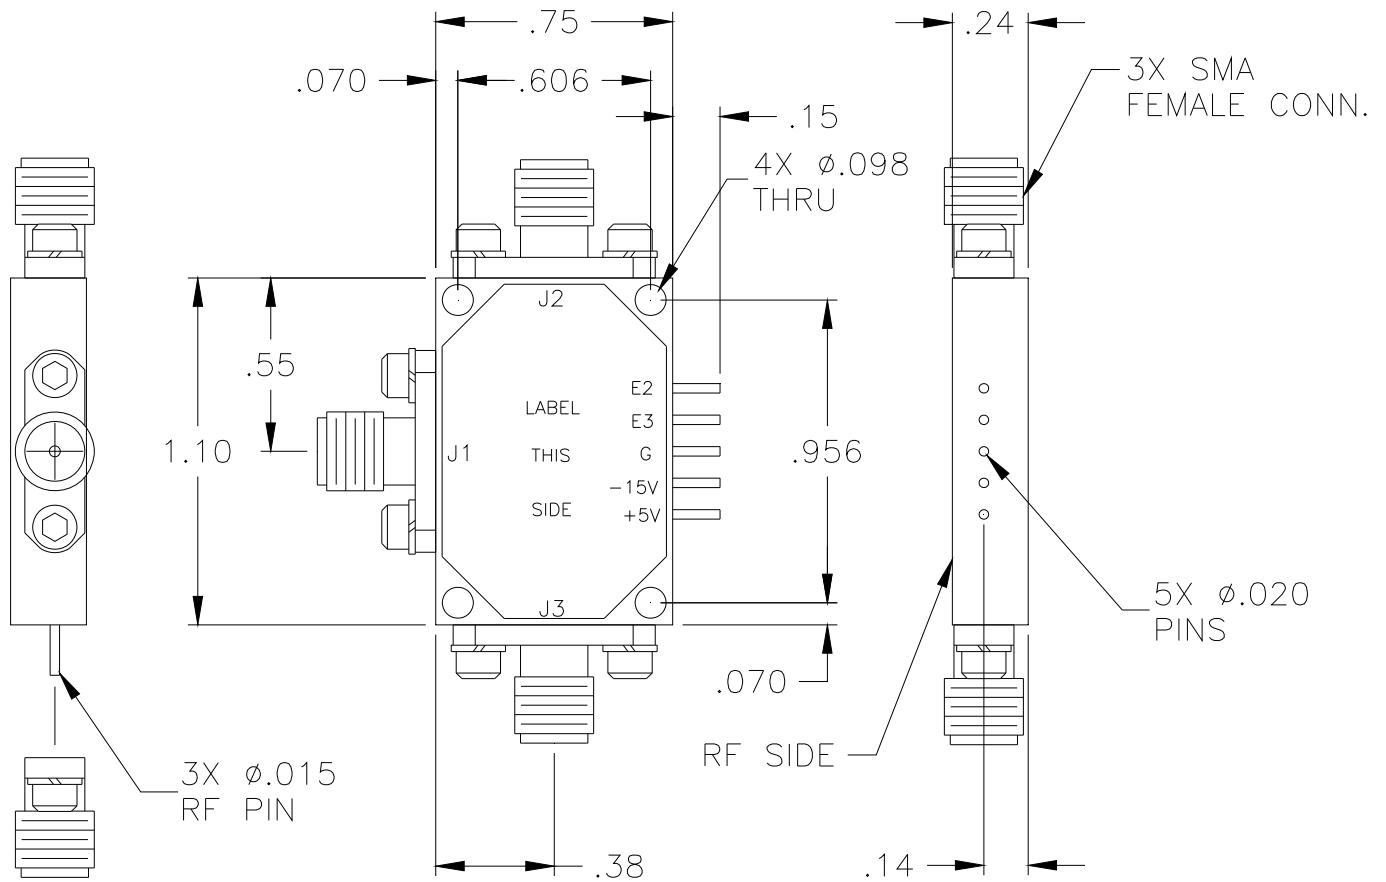

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com