

SP2T-2041R

➤ Features:

- Single Pole 2 Throw
- Reflective
- Low Insertion Loss
- 0.01 – 2 GHz



➤ Specifications:

SERIAL NUMBER	SELECTED PATH	FREQUENCY 10-2000 MHZ	INSERTION LOSS 2.5 dB MAX	INPUT VSWR ON 10.9 dBr MIN	OUTPUT VSWR ON 10.9 dBr MIN	OUTPUT VSWR OFF N/A	ISOLATION 45 dB MIN	SWITCHING SPEED 2000nS MAX
	J1-J2							
	J1-J3							
	J1-J2							
	J1-J3							
	J1-J2							
	J1-J3							
	J1-J2							
	J1-J3							

TRUTH TABLE	
CTL	RF ON
0	J1-J2
1	J1-J3




**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853
 PHONE: 410-742-8858
 FAX: 410-548-7860
www.microwave2000.com

SP2T-2041R

➤ Outline Drawing:

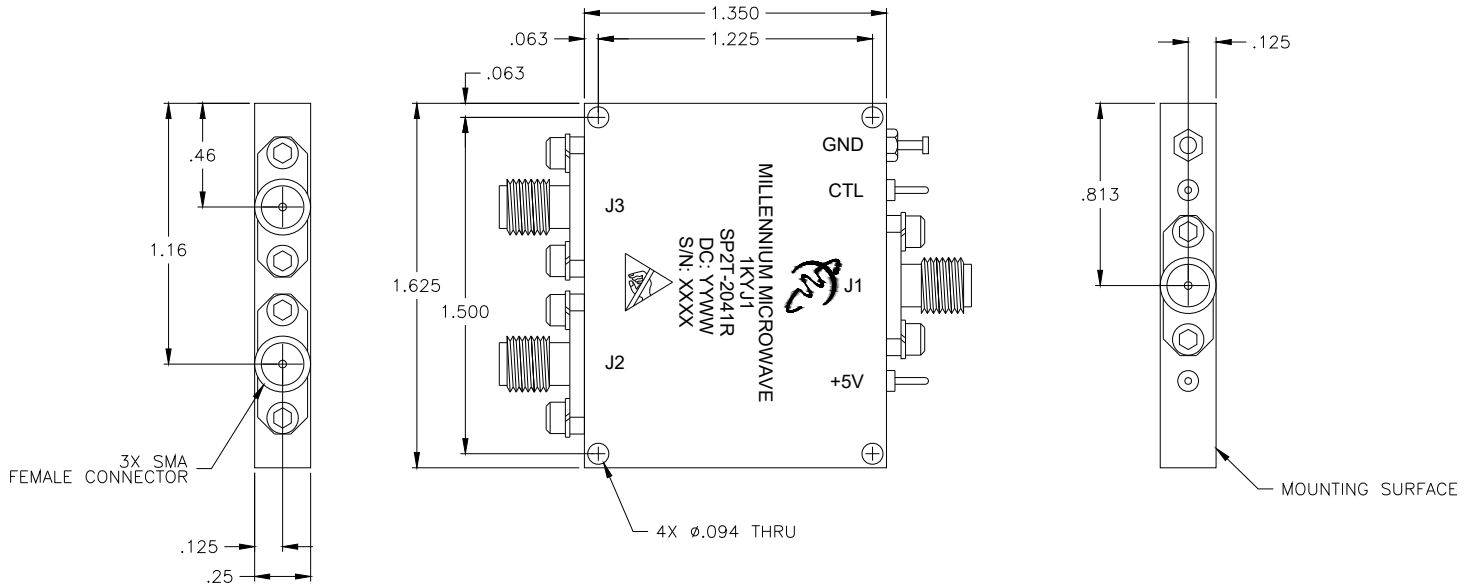

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com