


SP2T-2051NR

➤ Features:

- Single Pole 2 Throw
- Non-Reflective
- +5V
- 100 – 200 MHz

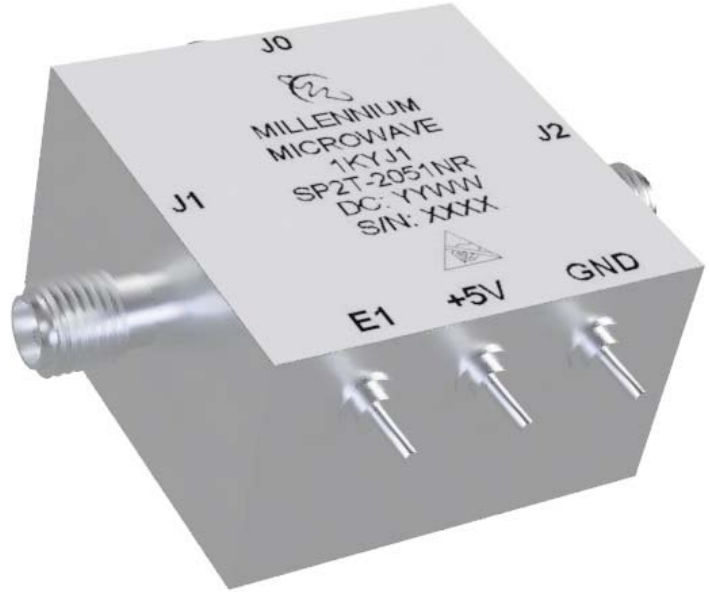

➤ Specifications:

SERIAL NUMBER	SELECTED PATH	FREQUENCY	INSERTION LOSS	VSWR INPUT	VSWR OUTPUT	ISOLATION	SWITCHING SPEED OFF-ON	SWITCHING SPEED ON-OFF	VERIFY LOGIC
	J1-J2	100 - 200 MHz	1.5 dB Max	1.8 Max 10.9 dBr Min	1.8 Max 10.9 dBr Min	55 dB Min	20nS Max	20nS Max	
	J1-J3								
	J1-J2								
	J1-J3								
	J1-J2								
	J1-J3								
	J1-J2								
	J1-J3								

E1	RF ON
0	J1-J3
1	J1-J2

DC Power	+5V 100 mA
	1mA




**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853
 PHONE: 410-742-8858
 FAX: 410-548-7860
www.microwave2000.com

SP2T-2051NR

➤ Outline Drawing:

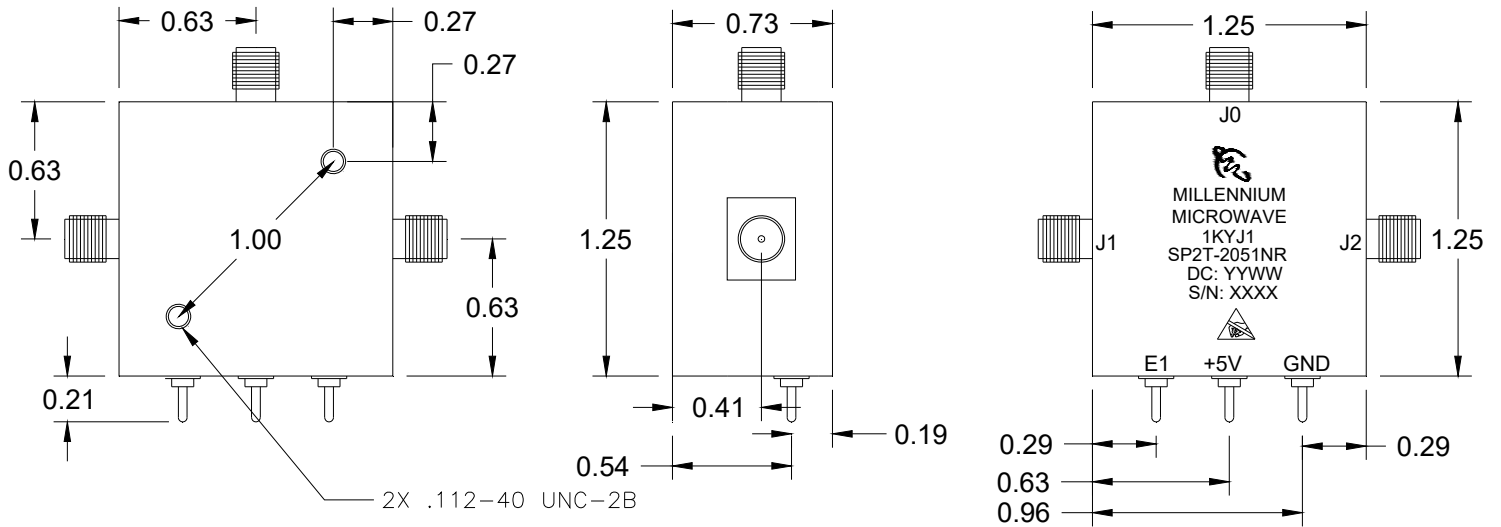

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com