


# SP3T-3021NR-A

## Features:

- Single Pole 3 Throw
- Non-Reflective
- RF Power +18 dBm Operating
- 11 – 19 GHz

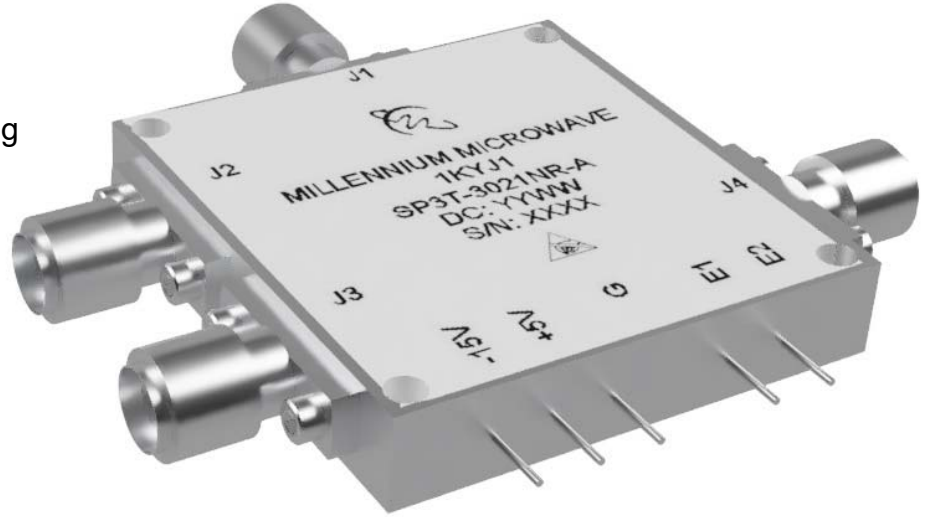

## Specifications:

Serial Number	Selected Path	Frequency 11.0 - 19.0 GHz	Insertion Loss 3.5 dB Max	VSWR Input (ON) 2.0:1 Max (9.5 dBr Min)	VSWR Output (ON/OFF) 2.0:1 Max (9.5 dBr Min)	Isolation 60 dB Min	Switching Speed On-off, off-on 500 nS Max	RF Power +18 dBm op +30 dBm Survival
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J2							
	J1-J3							
	J1-J4							

Control Logic: TTL, 2 Line Decoded

E1	E2	J1
0	0	Off
1	0	J2
0	1	J3

DC Power	+5VDC at 80 mA	-15VDC at 50 mA




**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
PHONE: 410-742-8858  
FAX: 410-548-7860  
www.microwave2000.com

# SP3T-3021NR-A

## ➤ Outline Drawing:

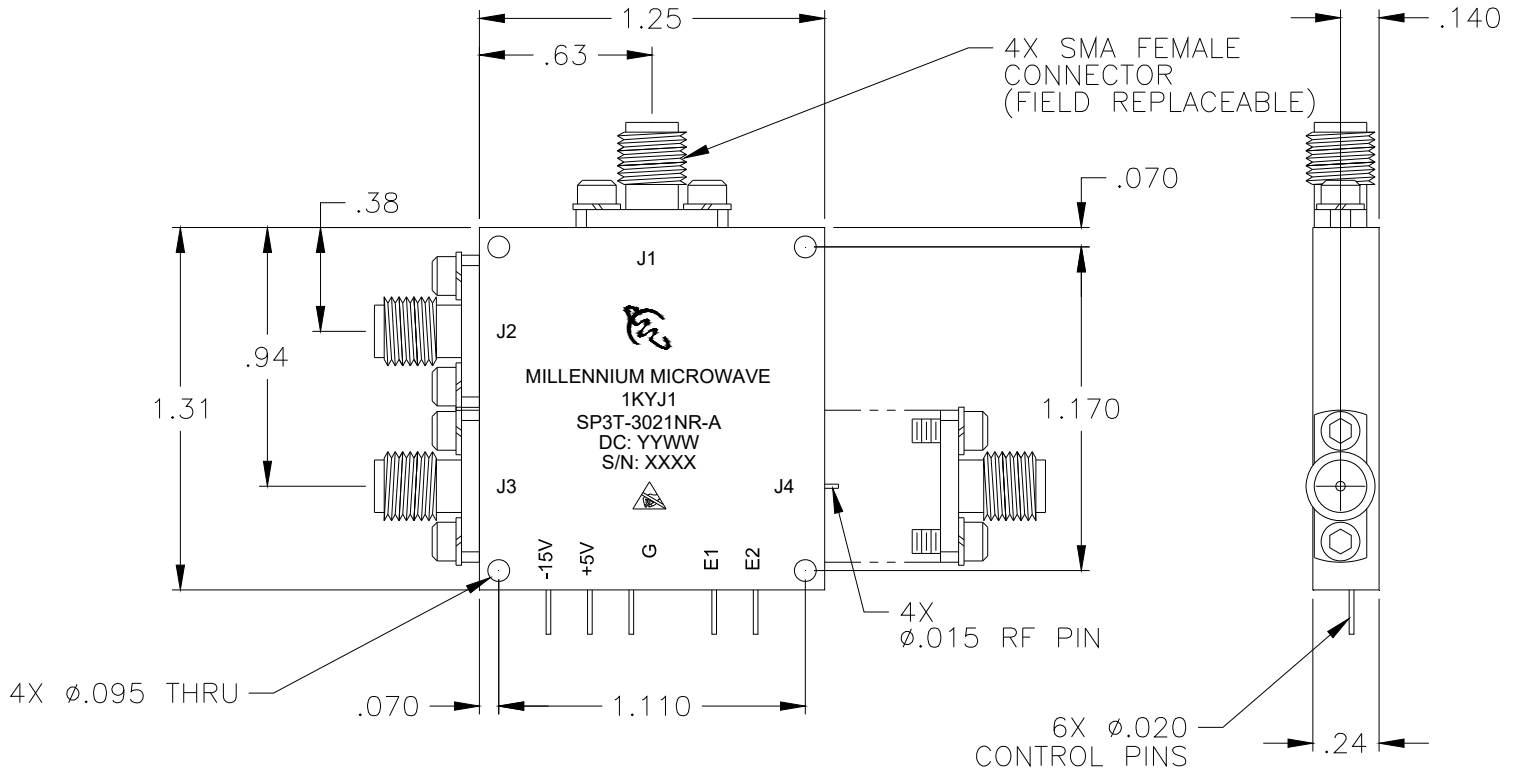

**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
PHONE: 410-742-8858  
FAX: 410-548-7860  
[www.microwave2000.com](http://www.microwave2000.com)