

SP4T-4002NR-B

➤ Features:

- Single Pole 4 Throw
- Non-Reflective
- .02 – 3 GHz
- 60 dB Isolation



➤ Specifications:

S/N	SELECTED PATH	FREQUENCY MHz 20-3000	INSERTION LOSS 2.0 dB Max	VSWR INPUT ON 1.7:1 MAX (11.7 dBr Min)	VSWR OUTPUT ON 1.7:1 MAX (11.7 dBr Min)	VSWR OUTPUT OFF 1.7:1 MAX (11.7 dBr Min)	ISOLATION 60 dB Min	PHASE MATCHING Path-Path ± 2.0 ° Max.	SWITCHING SPEED Off-On/On-Off 1.5 uS Max
	J1-J2								
	J1-J3								
	J1-J4								
	J1-J5								
	J1-J2								
	J1-J3								
	J1-J4								
	J1-J5								
	J1-J2								
	J1-J3								
	J1-J4								
	J1-J5								

Control: 4 Line TTL, Logic 1 Path on

Power: +5VDC @ 150mA, +15VDC @ 30 mA typical




**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com

SP4T-4002NR-B

➤ Outline Drawing:

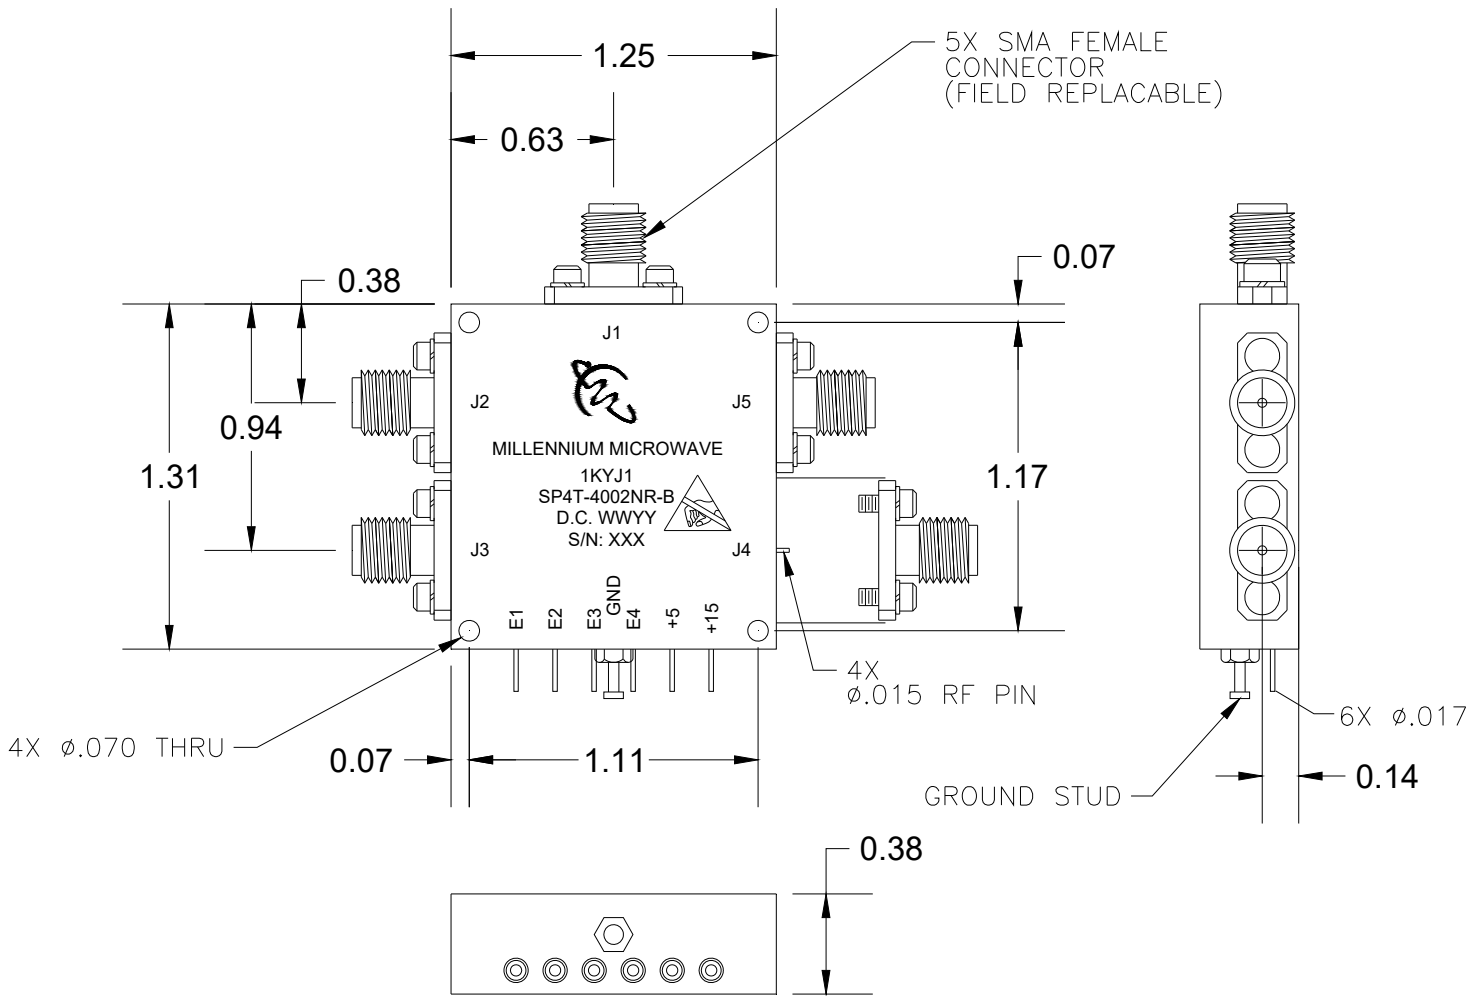

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com