

SP4T-4009NR

➤ Features:

- Single Pole 4 Throw
- Non-Reflective
- Custom Package
- 0.02 – 2.6 GHz



➤ Specifications:

S/N	SELECTED PATH	FREQUENCY GHz	INSERTION LOSS 1.8 dB Max	VSWR INPUT ON -14 dBr Min	VSWR OUTPUT ON -14 dBr Min	VSWR OUTPUT OFF -14 dBr Min	ISOLATION 60 dB Min
	J1-J2	0.02 - 2.0					
	J1-J3	2.0 - 2.6					
	J1-J4	2.0 - 2.6					
	J1-J5	2.0 - 2.6					
	J1-J2	0.02 - 2.0					
	J1-J3	2.0 - 2.6					
	J1-J4	2.0 - 2.6					
	J1-J5	2.0 - 2.6					
	J1-J2	0.02 - 2.0					
	J1-J3	2.0 - 2.6					
	J1-J4	2.0 - 2.6					
	J1-J5	2.0 - 2.6					




**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853
 PHONE: 410-742-8858
 FAX: 410-548-7860
www.microwave2000.com

SP4T-4009NR

➤ Outline Drawing:

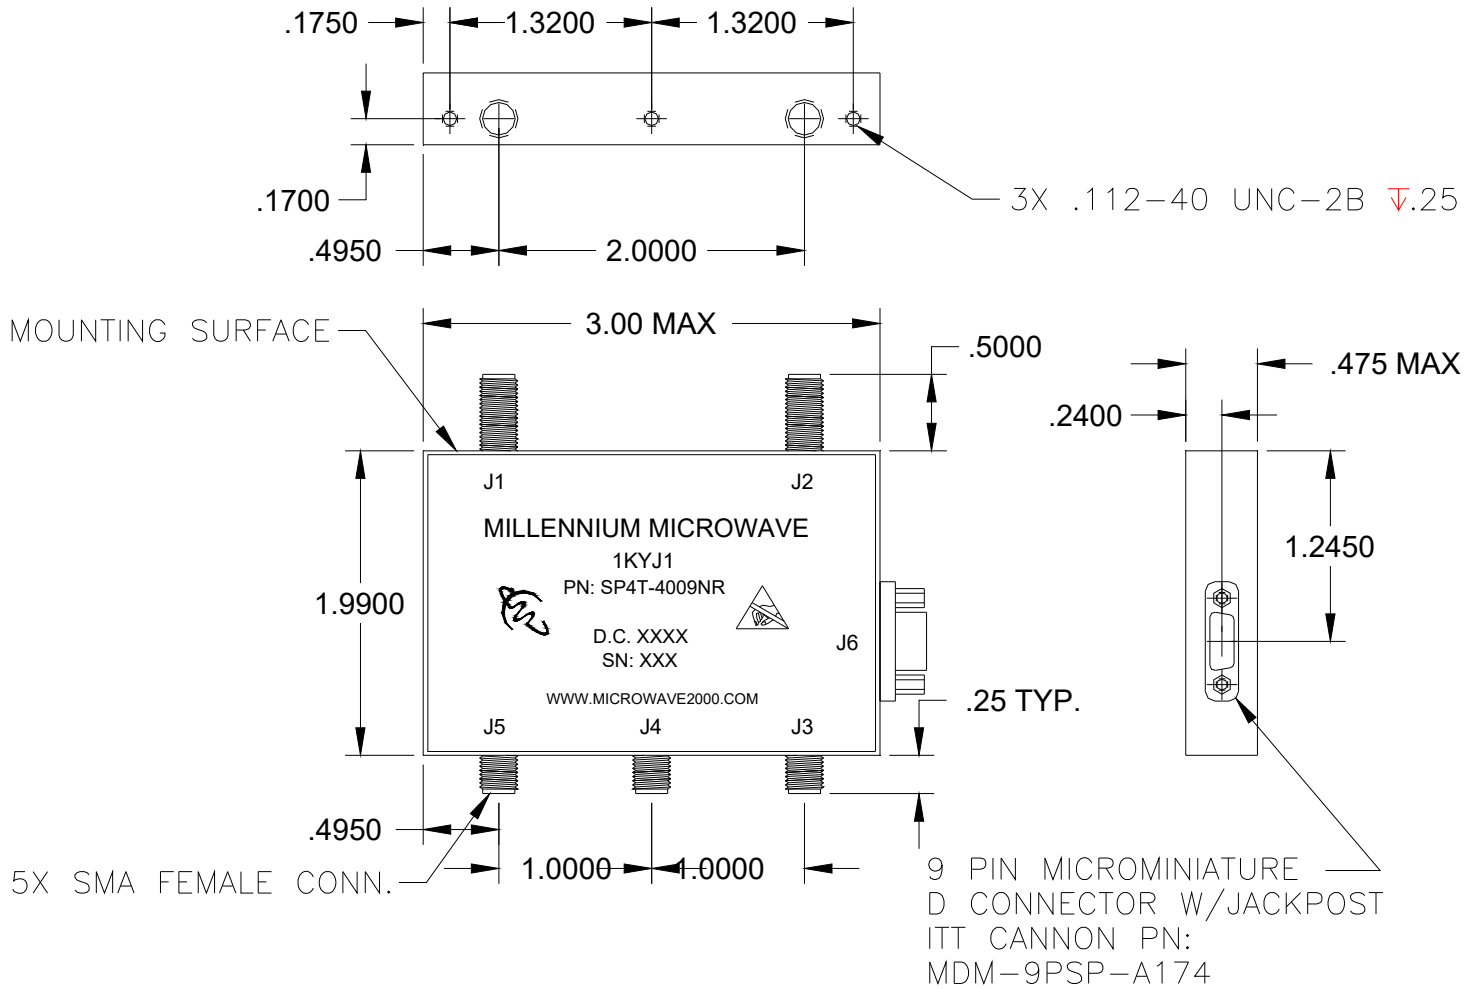

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com