

SP4T-4013R

Features:

- Single Pole 4 Throw
- Reflective
- 4 Line TTL
- 0.5 – 18 GHz



Specifications:

SERIAL NUMBER	SELECTED PATH	FREQUENCY 0.5-18.0 GHz	INSERTION LOSS 3.5 dB Max	VSWR INPUT 2.0:1	VSWR OUTPUT 2.0:1	ISOLATION 70 dB Min	SWITCHING SPEED 250 nS Max	4 Line TTL Logic 1 Path on
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							

CURRENT		
	+5 VDC	- 15 VDC
All Off		
1 Path ON		




**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853
 PHONE: 410-742-8858
 FAX: 410-548-7860
www.microwave2000.com

SP4T-4013R

➤ Outline Drawing:

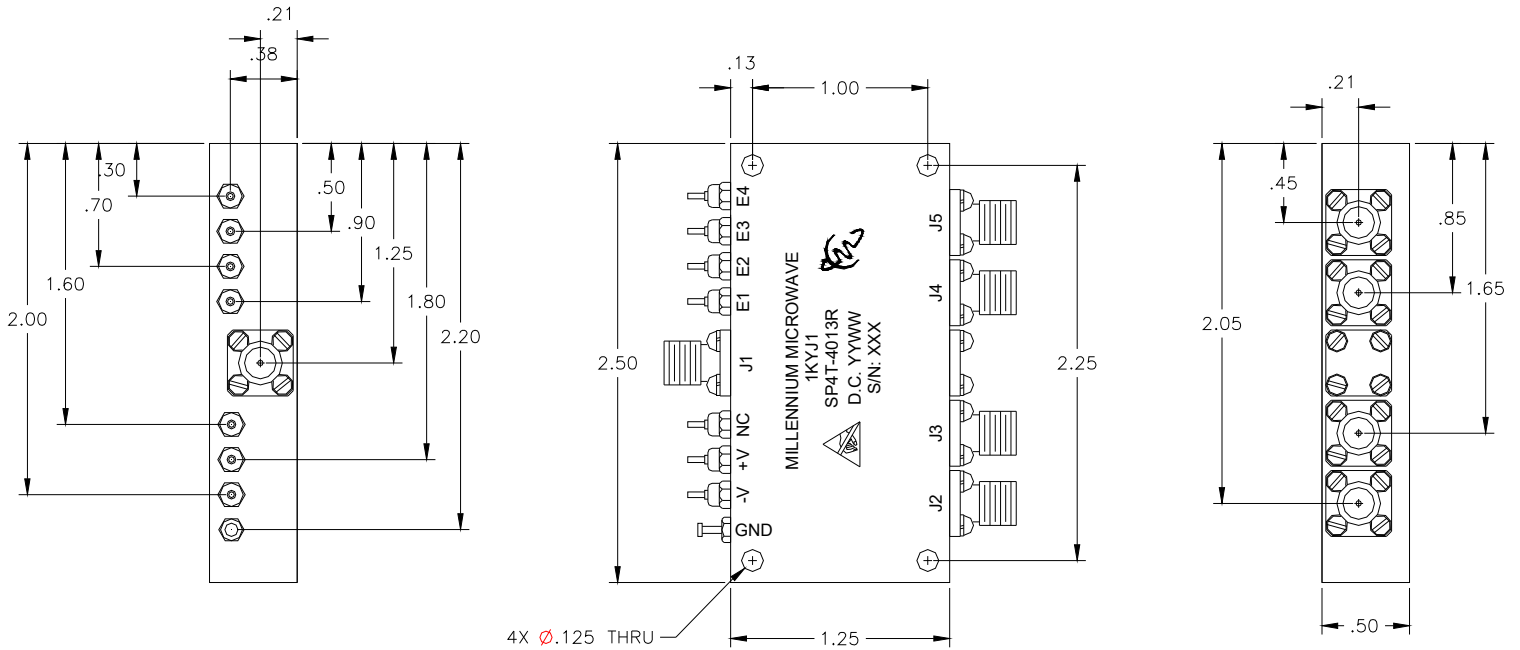

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com