

SP4T-4014R

Features:

- Single Pole 4 Throw
- Reflective
- 65 dB Isolation
- 0.5 – 18 GHz



Specifications:

| S/N | SELECTED PATH | FREQUENCY MHz 0.5 - 18GHz | INSERTION LOSS 3.0 dB Max | VSWR INPUT ON 1.7:1 MAX (11.7 dBr Min) | VSWR OUTPUT ON 1.7:1 MAX (11.7 dBr Min) | ISOLATION 65 dB Min | SWITCHING SPEED Off-On/On-Off 150 nS Max | VERIFY LOGIC |
|-----|---------------|------------------------------|------------------------------|--|---|------------------------|--|--------------|
| | J1-J2 | | | | | | | |
| | J1-J3 | | | | | | | |
| | J1-J4 | | | | | | | |
| | J1-J5 | | | | | | | |
| | J1-J2 | | | | | | | |
| | J1-J3 | | | | | | | |
| | J1-J4 | | | | | | | |
| | J1-J5 | | | | | | | |
| | J1-J2 | | | | | | | |
| | J1-J3 | | | | | | | |
| | J1-J4 | | | | | | | |
| | J1-J5 | | | | | | | |
| | J1-J2 | | | | | | | |

Control: 4 Line TTL, Logic 1 Path on
 Power: +5VDC @ 150mA, -15VDC @ 30 mA typical




**MILLENNIUM
 MICROWAVE
 CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853
 PHONE: 410-742-8858
 FAX: 410-548-7860
www.microwave2000.com

SP4T-4014R

➤ Outline Drawing:

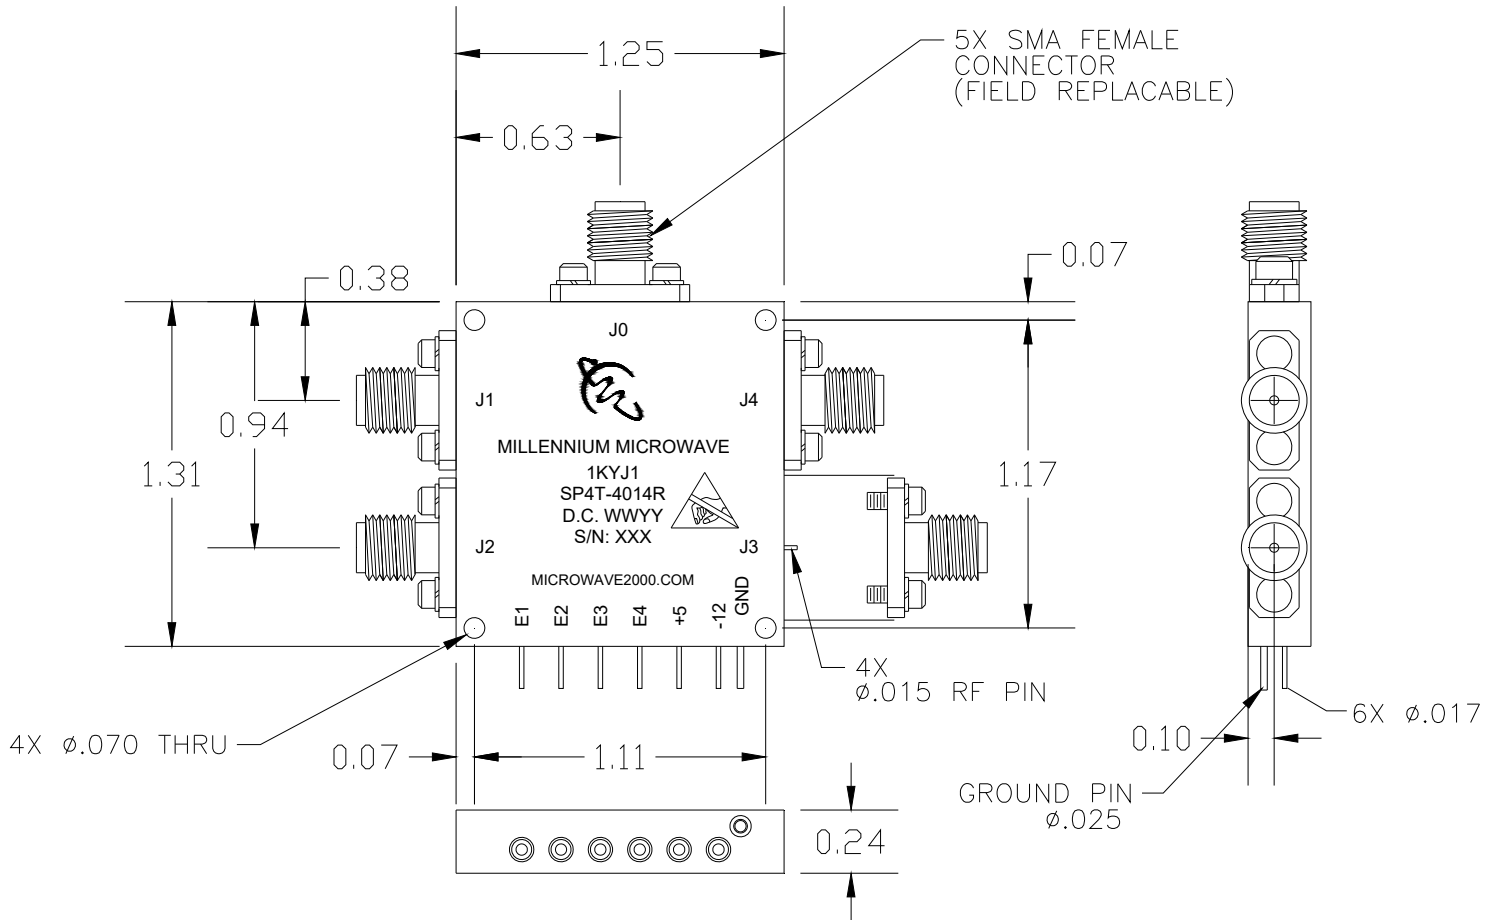

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com