


SP4T-4016NR-A

Features:

- Single Pole 4 Throw
- Non-Reflective
- 4 Line TTL
- 0.02 – 2.5 GHz

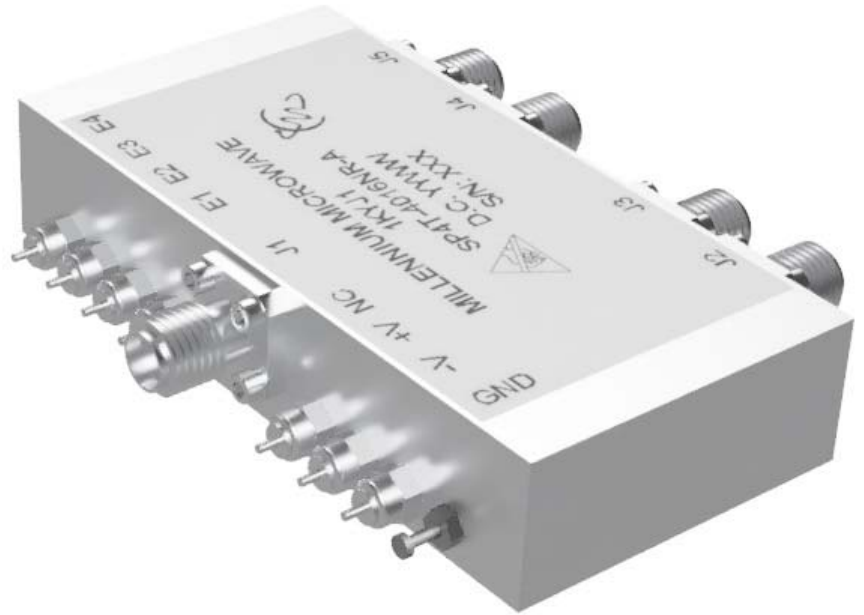

Specifications:

S/N	SELECTED PATH	FREQUENCY MHz	INSERTION LOSS 2.0 dB Max	VSWR INPUT ON 1.6:1 MAX (12.7 dBr Min)	VSWR OUTPUT ON 1.6:1 MAX (12.7 dBr Min)	VSWR OUTPUT OFF 1.6:1 MAX (12.7 dBr Min)	ISOLATION 60 dB Min	SWITCHING SPEED Off-On/On-Off 400 nS Max
		20-2500						
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							

Control: 4 Line TTL, Logic 1 Path on
 Power: +5VDC @ 150mA, +15VDC @ 30 mA typical




**MILLENNIUM
 MICROWAVE
 CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853
 PHONE: 410-742-8858
 FAX: 410-548-7860
www.microwave2000.com

SP4T-4016NR-A

➤ Outline Drawing:

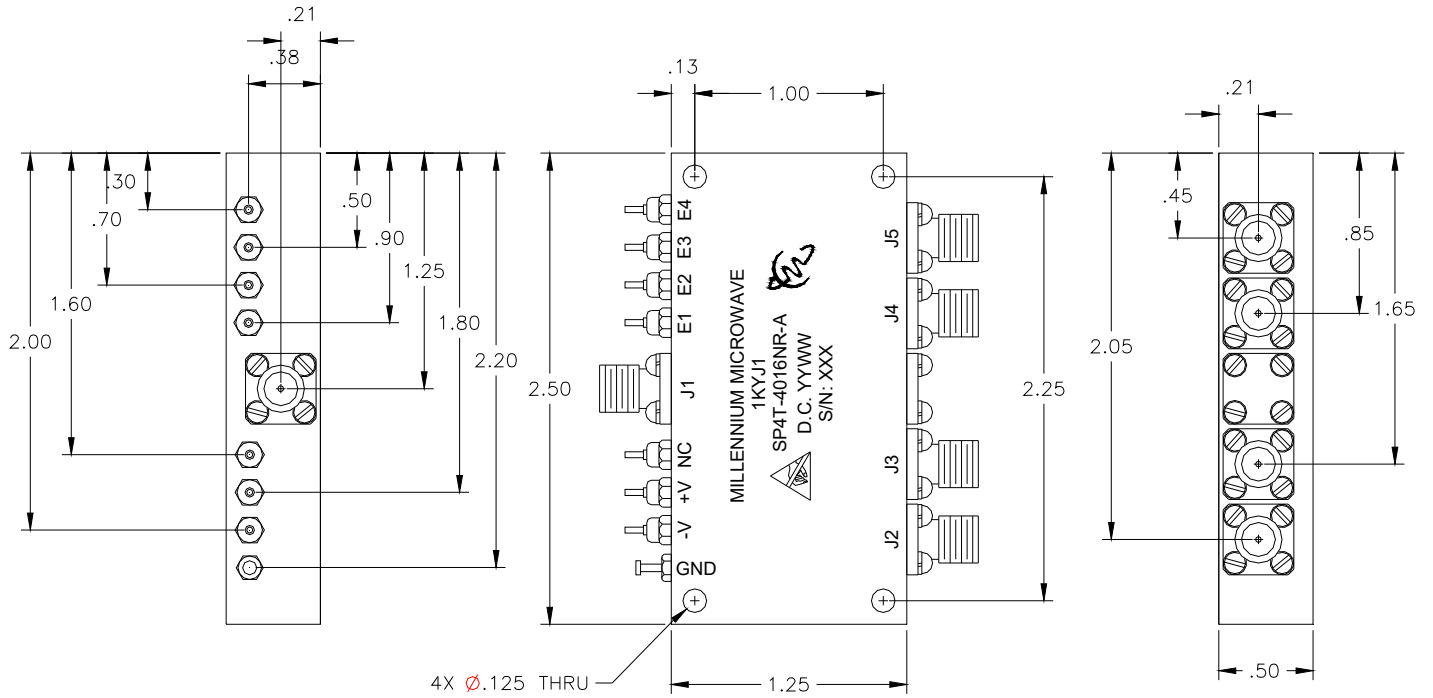

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com