


# SP6T-6001NR-A

## Features:

- Single Pole 6 Throw
- Non-Reflective
- +5 / -15V
- 8 – 11 GHz

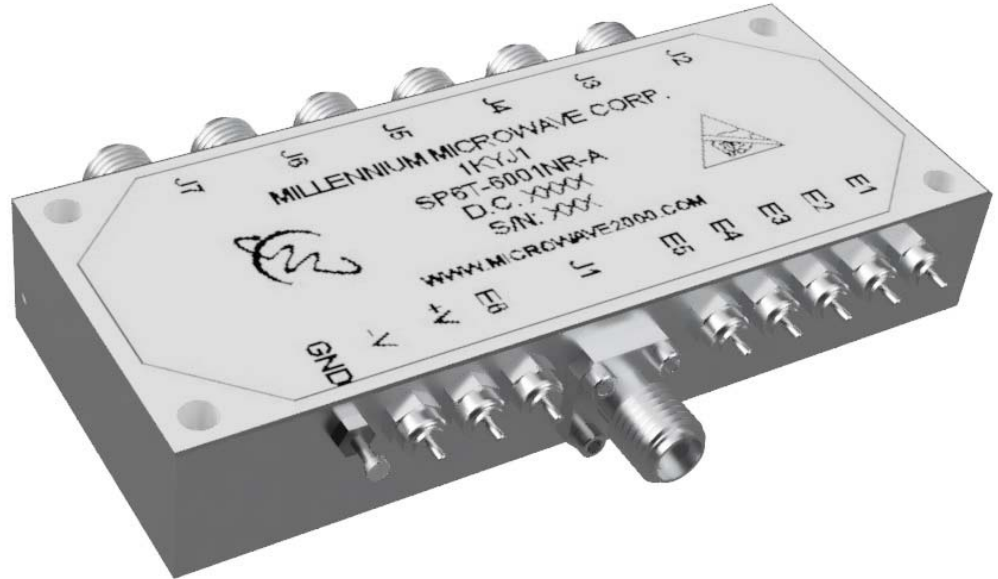

## Specifications:

SERIAL NUMBER	SELECTED PATH	FREQUENCY	INSERTION LOSS	VSWR INPUT	VSWR OUTPUT ON	VSWR OUTPUT OFF	ISOLATION	SWITCHING SPEED	
		8.0-11.0 GHZ	3.5 dB MAX	9.5 dBr Min	9.5 dBr Min	9.5 dBr Min	55 dB Min	<400 nS MAX *1	
	J1-J2							ON - OFF =	
	J1-J3								
	J1-J4							OFF - ON =	
	J1-J5								
	J1-J6								
	J1-J7								
	J1-J2							ON - OFF =	
	J1-J3								
	J1-J4							OFF - ON =	
	J1-J5								
	J1-J6								
	J1-J7								
	J1-J2							ON - OFF =	
	J1-J3								
	J1-J4							OFF - ON =	
	J1-J5								
	J1-J6								
	J1-J7								

\*1. SWITCHING SPEED TO BE MEASURED ON ALL UNITS FROM 50% TTL TO 90%/10% RF.

POWER SUPPLY	
+5V @ 120mA MAX	
-15V @ 50mA MAX	




**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
PHONE: 410-742-8858  
FAX: 410-548-7860  
www.microwave2000.com

# SP6T-6001NR-A

## ➤ Outline Drawing:

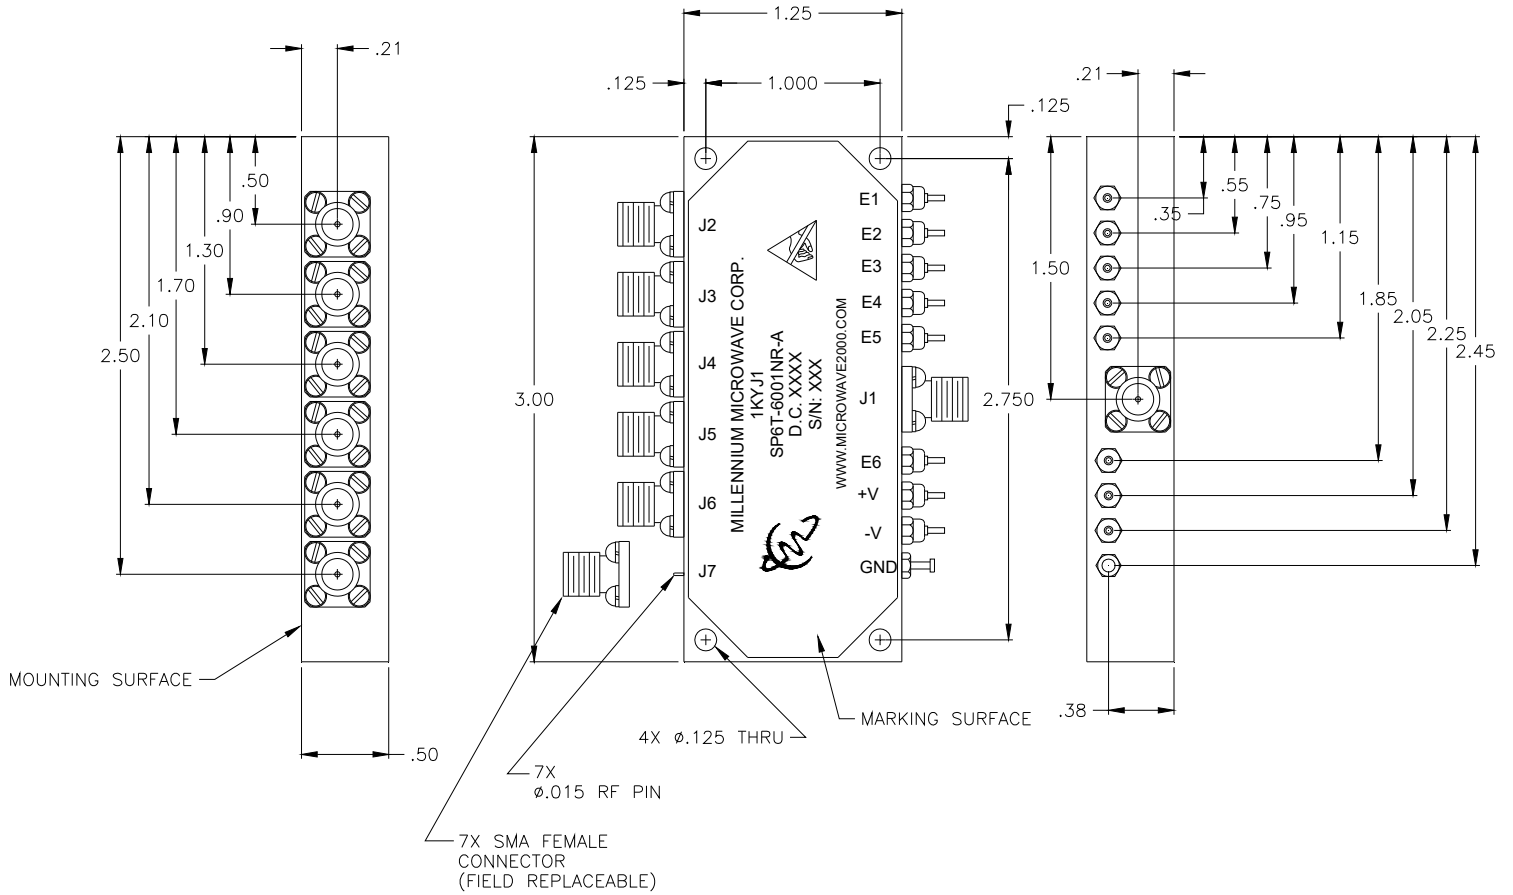

**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
PHONE: 410-742-8858  
FAX: 410-548-7860  
www.microwave2000.com