

SP6T-6001NR-B

➤ Features:

- Single Pole 6 Throw
- Non-Reflective
- Isolation 60 dB
- 1.2 – 1.4 GHz



➤ Specifications:

SERIAL NUMBER	SELECTED PATH	FREQUENCY	INSERTION LOSS	VSWR INPUT	VSWR OUTPUT ON	VSWR OUTPUT OFF	ISOLATION	SWITCHING SPEED
		1.2 - 1.4 GHz	1.8 dB MAX	10.88 dBr Min	10.88 dBr Min	10.88 dBr Min	60 dB Min	300ns MAX *1
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							
	J1-J6							
	J1-J7							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							
	J1-J6							
	J1-J7							
	J1-J2							
	J1-J3							
	J1-J4							
	J1-J5							
	J1-J6							
	J1-J7							

+5 V @150mA Max	
-15 v @150mA Max	
Logic 1 = Path on	
Logic 0 = Path off	

*1. SWITCHING SPEED TO BE MEASURED ON ALL UNITS FROM 50% TTL TO 90%/10% RF.




**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853
 PHONE: 410-742-8858
 FAX: 410-548-7860
www.microwave2000.com

SP6T-6001NR-B

➤ Outline Drawing:

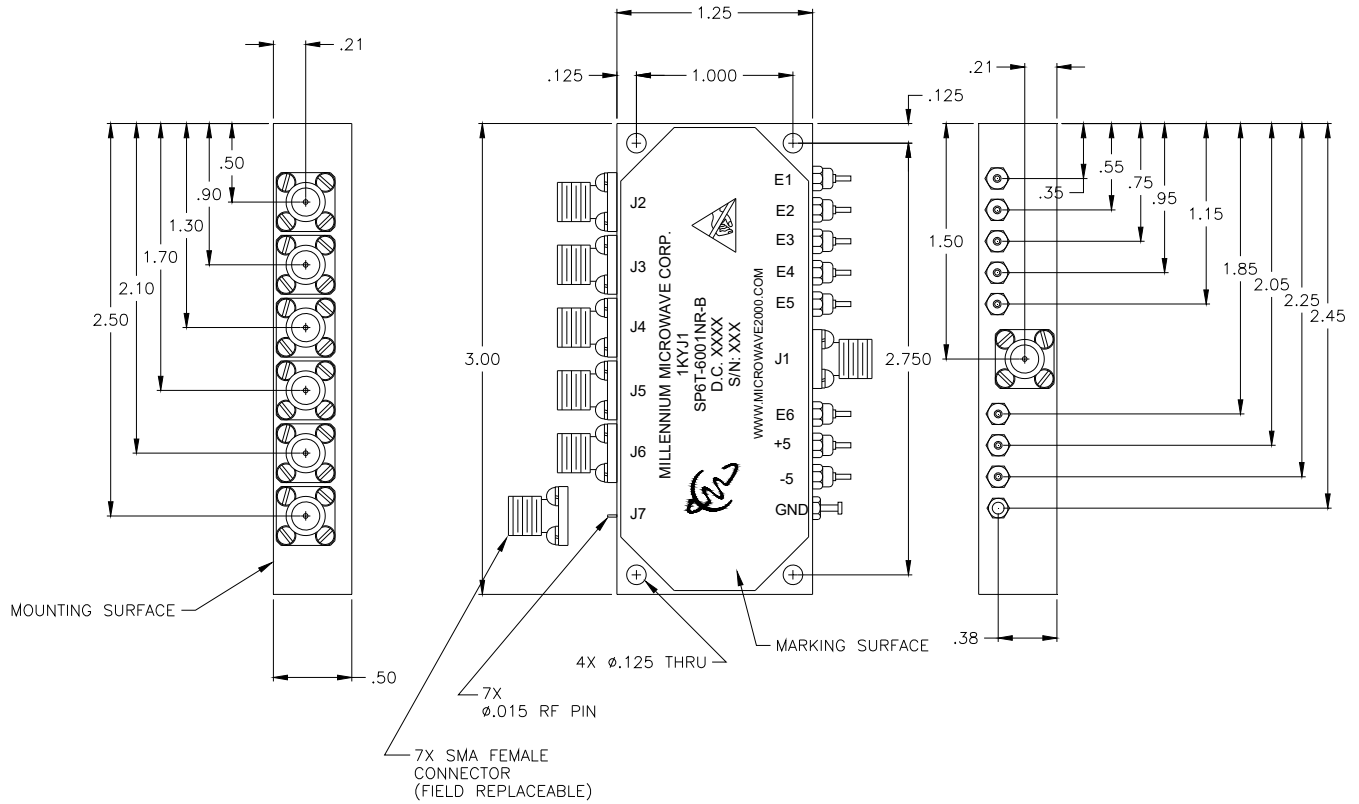

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com