


SP9T-9002NR-A

Features:

- Single Pole 9 Throw
- Non-Reflective
- Individual Line Control
- 0.95 – 2.15 GHz

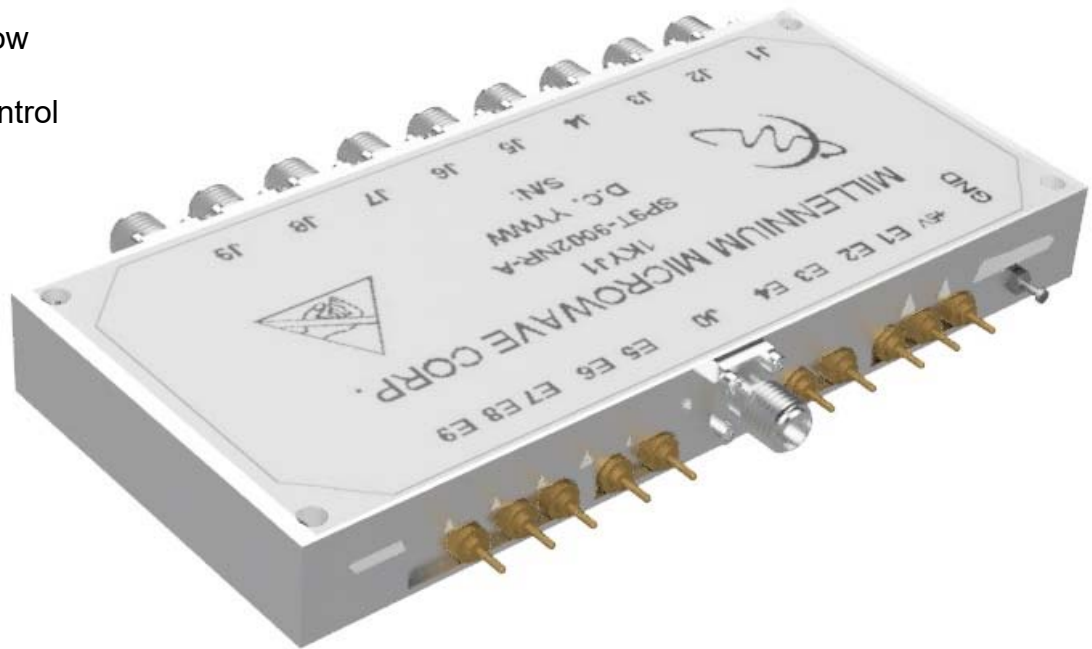

Specifications:

| S/N | SELECTED PATH | FREQUENCY | INSERTION LOSS | VSWR INPUT ON | VSWR OUPUT ON | VSWR OUPUT OFF | ISOLATION | SWITCHING SPEED | TTL |
|-----|---------------|---------------|----------------|-------------------------|-------------------------|-------------------------|-----------|---------------------|--------------------------|
| | J0-J1 | 950 - 2150MHz | 2.0 dB Max | 1.5:1 MAX (13.979dB) | 1.5:1 MAX (13.979dB) | 1.5:1 MAX (13.979dB) | 60 dB MIN | 1 μ S MAX | 1=ON 0=OFF |
| | J0-J2 | | | | | | | On - Off | |
| | J0-J3 | | | | | | | Off - On | |
| | J0-J4 | | | | | | | POWER SUPPLY | |
| | J0-J5 | | | | | | | +5VDC 150mA | |
| | J0-J6 | | | | | | | MAX | |
| | J0-J7 | | | | | | | | |
| | J0-J8 | | | | | | | | OIP3 = +20dBm MIN |
| | J0-J9 | | | | | | | | OIP2 = +45dBm MIN |
| | J0-J1 | | | | | | | | |
| | J0-J2 | | | | | | | | |
| | J0-J3 | | | | | | | | |
| | J0-J4 | | | | | | | | |
| | J0-J5 | | | | | | | | |
| | J0-J6 | | | | | | | | |
| | J0-J7 | | | | | | | | |
| | J0-J8 | | | | | | | | |
| | J0-J9 | | | | | | | | |




**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com

SP9T-9002NR-A

➤ Outline Drawing:

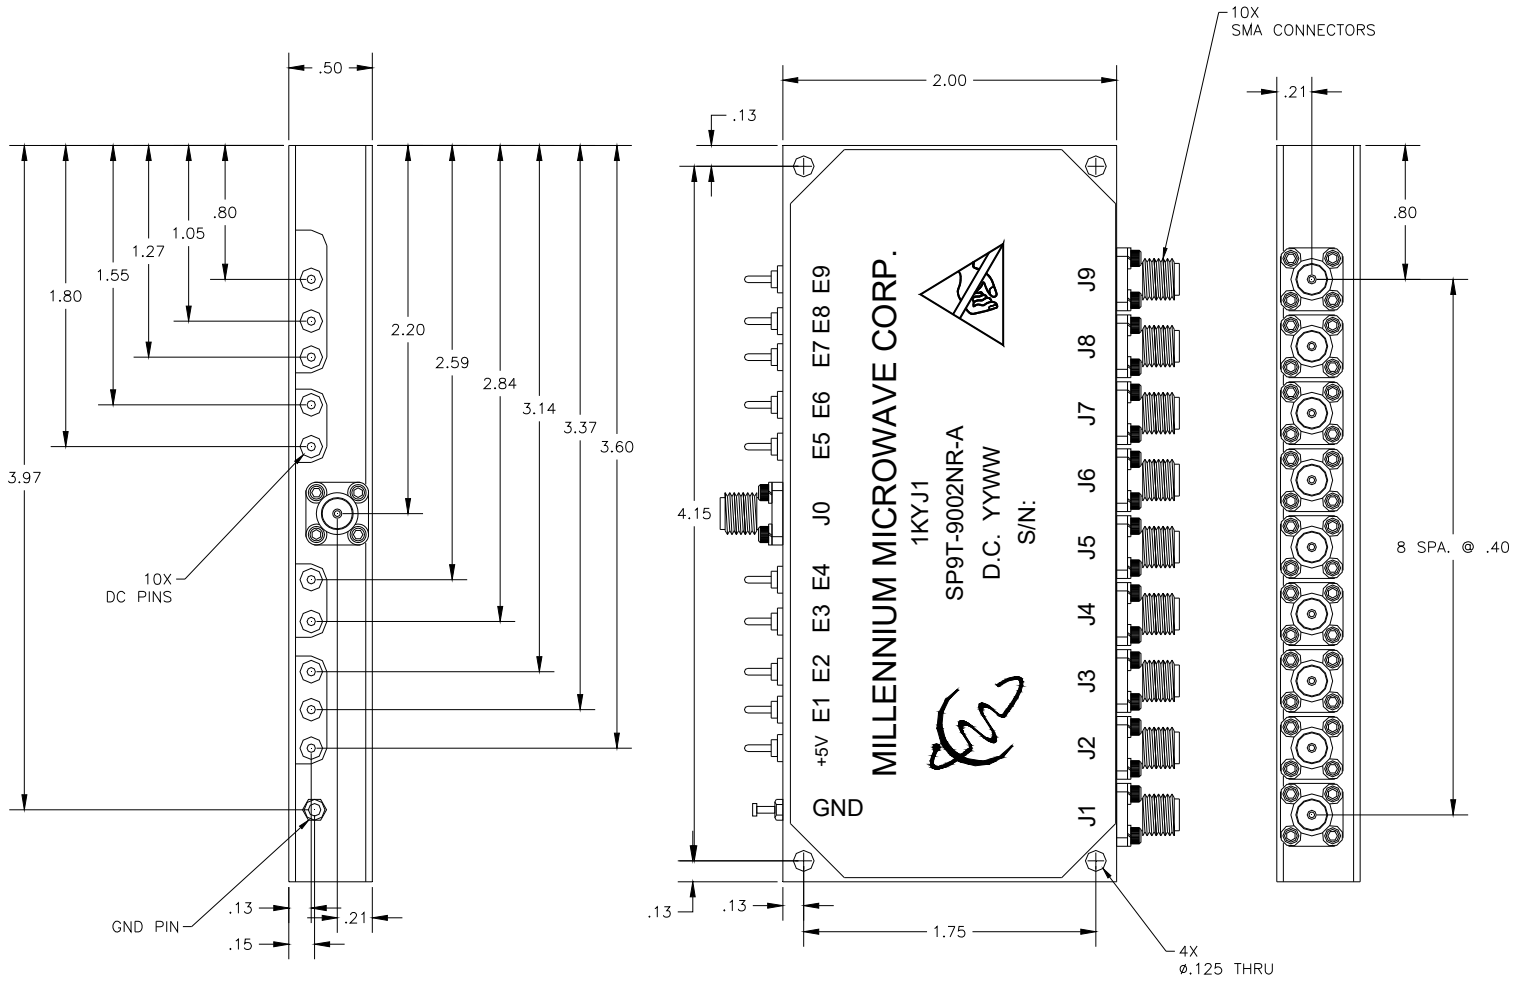

**MILLENNIUM
MICROWAVE
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION
30733 PARK DRIVE, PRINCESS ANNE, MD 21853
PHONE: 410-742-8858
FAX: 410-548-7860
www.microwave2000.com