


➤ **Features:**

- Filter Module
- Four Individual Filters
- Mil-Std 202
- 500 – 6000 MHz

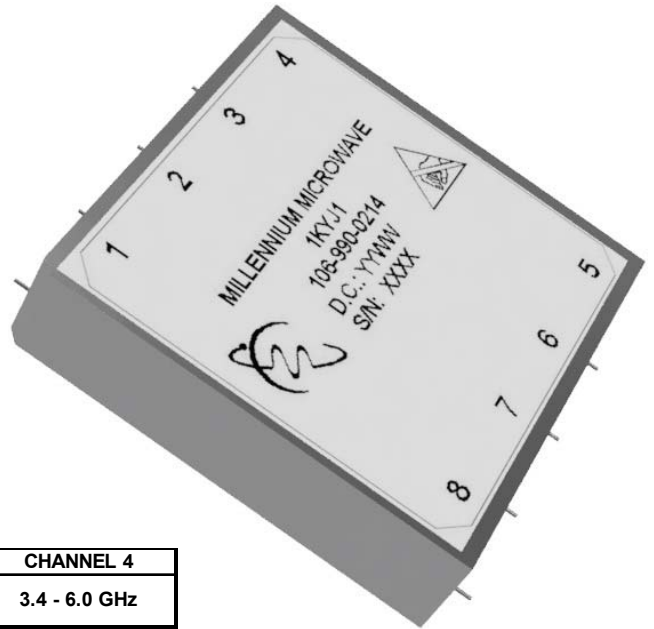

➤ **Specifications:**


PASSBAND FREQUENCY	BAND 1		BAND 2		BAND 3		CHANNEL 4	
	0.5 - 0.95 GHz		1.45 - 2.6 GHz		2.1 - 3.9 GHz		3.4 - 6.0 GHz	
MAX PASSBAND INSERTION LOSS	2.0 dB Max		2.0 dB Max		2.0 dB Max		2.0 dB Max	
INSERTION LOSS VARIATION 1.0dB P/P								
PASSBAND VSWR	1.5:1 Max		1.5:1 Max		1.5:1 Max		1.5:1 Max	
IN								
OUT								
LOW SIDE	DC - 0.1 GHz		DC - 0.5 GHz		DC - 0.66 GHz		DC - 1.65 GHz	
REJECTION *1	45 dB		45 dB		45 dB		45 dB	
LOW SIDE	0.35 GHz		0.685 GHz		1.8 GHz		2.70 GHz	
REJECTION *1	15 dB		30 dB		12 dB		15 dB	
LOW SIDE			1.07 GHz					
REJECTION *1			15 dB					
HIGH SIDE	1.25 to 1.5 GHz		3.06 GHz		4.40 GHz		6.90 GHz	
REJECTION *1	12 dB		12 dB		12 dB		12 dB	
HIGH SIDE	2.00 to 4.00 GHz		3.40 GHz		5.00 GHz		8.00 GHz	
REJECTION *1	30 dB		20 dB		30 dB		20 dB	
HIGH SIDE	4.9 to 5.6 GHz		4.00 GHz		5.88 GHz		10 GHz	
REJECTION *1	45 dB		35 dB		45 dB		35 dB	
HIGH SIDE	10 GHz		4.9 to 5.60 GHz		10 GHz		16.5 GHz	
REJECTION *1	35 dB		45 dB		35 dB		25 dB	
HIGH SIDE	16.5 GHz		10 GHz		16.5 GHz			
REJECTION *1	25 dB		35 dB		25 dB			
HIGH SIDE			16.5 GHz					
REJECTION *1			25 dB					



**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
 30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
 PHONE: 410-742-8858  
 FAX: 410-548-7860  
[www.microwave2000.com](http://www.microwave2000.com)

➤ Outline Drawing:

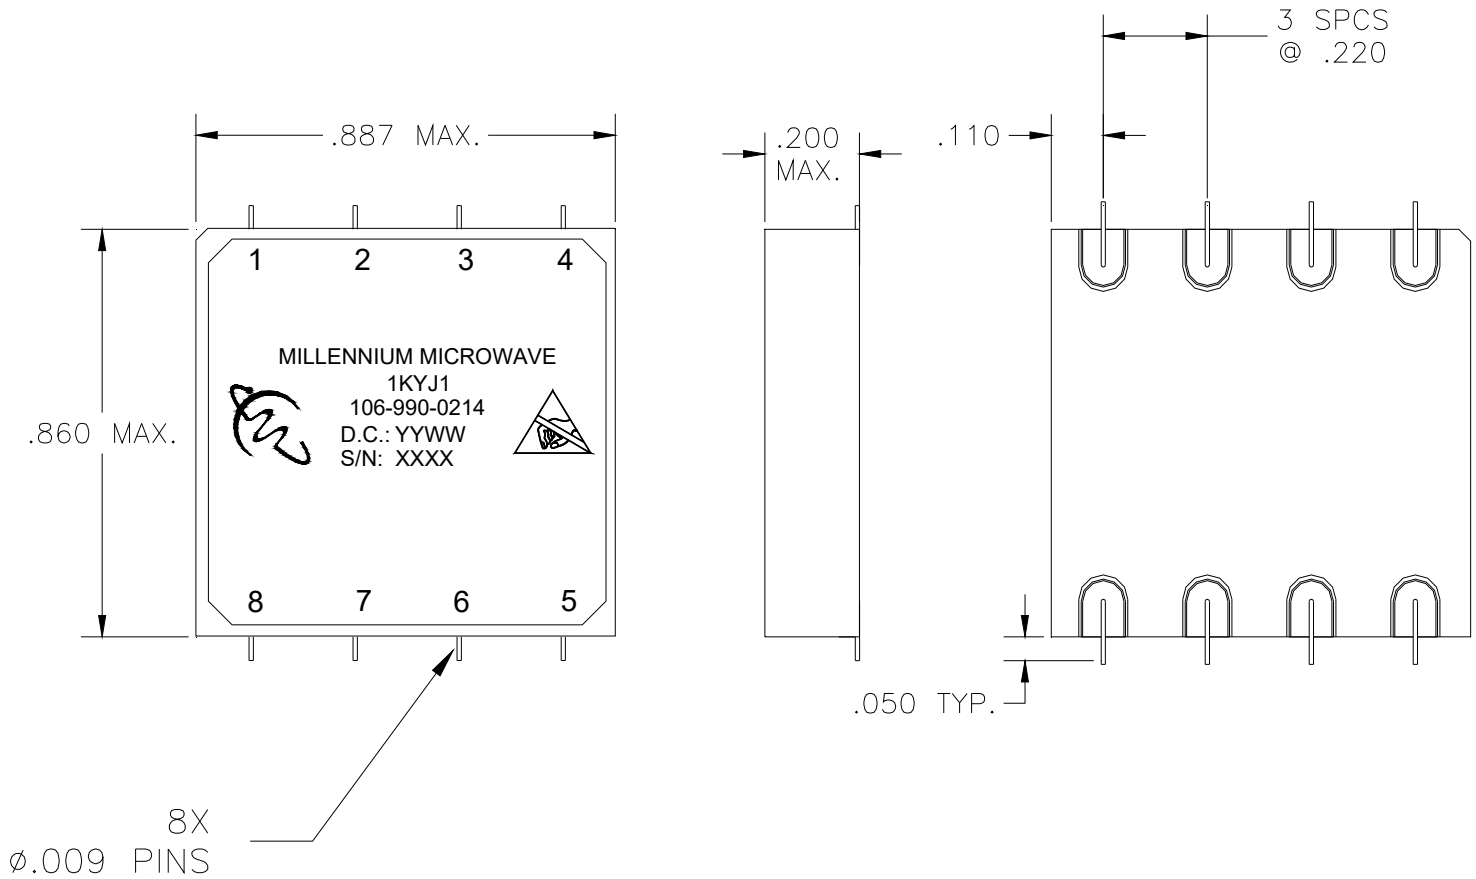

**MILLENNIUM  
MICROWAVE  
CORPORATION**

MILLENNIUM MICROWAVE CORPORATION  
30733 PARK DRIVE, PRINCESS ANNE, MD 21853  
PHONE: 410-742-8858  
FAX: 410-548-7860  
[www.microwave2000.com](http://www.microwave2000.com)